

1.27mm(.050") Wire To Board Connector





Connector & Terminal

Shenzhen Hongru Connector Co., Ltd

SPECIFICATIONS:

- Current Rating:1AAC,DC
- Voltage Rating:100V AC,DC
- Operating Temperature:-40℃~+105℃
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:500V AC/minute
- Wire Size:AWG#28
- MATERIAL
- Housing: PA46(red) UL94V-0
- Male Contact:Phosphor bronze
- Finish:Tin Over nickel plated

Email:yukyli@hrb-connector.com
 Tel: 086(0755)27096669
 Skype: haiyuncheng-vivian
 Mobile(whatsapp): 086-186 8112 3590
 Website: http://www.hrb-connector.com

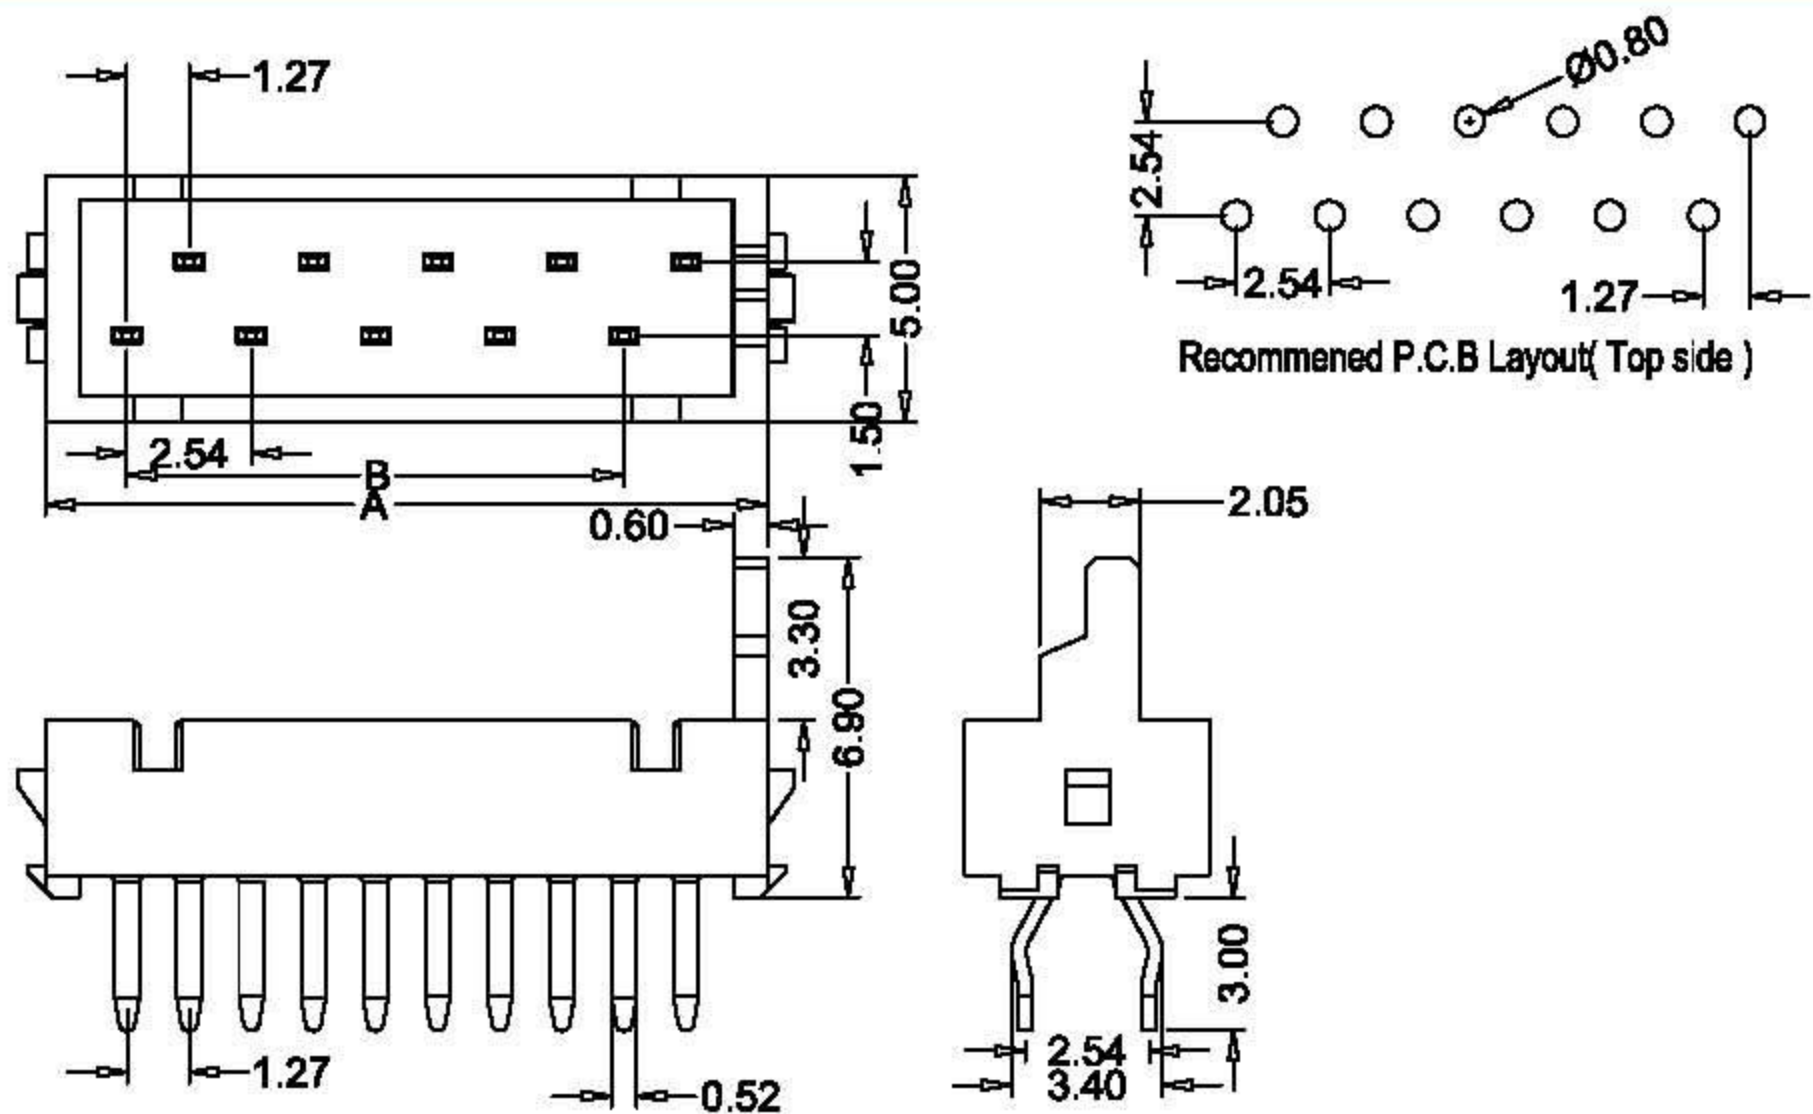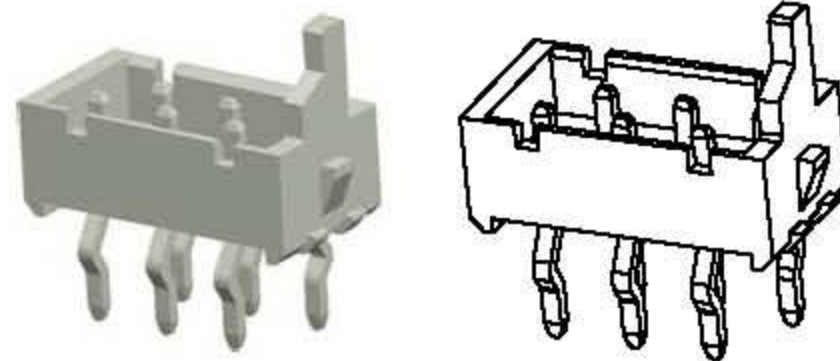

Ordering Information And Dimensions

Part NO.		Dimensions		Part NO.		Dimensions	
TYP UL94V-0	Circuits	Dim:A	Dim:B	TYP UL94V-0	Circuits	Dim:A	Dim:B
M25483-2x2	4	7.20	2.54	M25483-2x8	16	22.44	17.78
M25483-2x3	6	9.74	5.08	M25483-2x9	18	24.98	20.32
M25483-2x4	8	12.28	7.62	M25483-2x10	20	27.52	22.86
M25483-2x5	10	14.82	10.16	M25483-2x11	22	30.06	25.40
M25483-2x6	12	17.36	12.70	M25483-2x12	24	32.60	27.94
M25483-2x7	14	19.90	15.24				

